

## 540 Setpoint transmitter

- Output 0/4..20 mA or 0..10 V
- 10-turn potentiometer for setpoint
- Scalable display range -999..1999
- Power supply 115VAC or 230 VAC
- Panel size 96 x 96 mm





Setpoint controller 540 is designed for easy setpoint change. Output is adjusted via front panel 10-round potentiometer, setpoint can be locked up with mechanic friction lock. The setpoint potentiometer is selected to meet the demands of daily use. Display can be rescaled within limits -999..1999. The setpoint controller 540 is delivered according to an ordered range and output, standard display range is 0-100.0 and output 4-20 mA. Display and output range can be changed later inside of case.

### Technical specifications:

<b>Output:</b>	0..20 mA, 4..20 mA tai 0..10 V
<b>Maximum load:</b>	1000 Ω
<b>Potentiometer:</b>	10-turn
<b>Resolution:</b>	1/1000
<b>Display:</b>	14.5 mm, bright red LED
<b>Display range:</b>	-999..1999
	selectable decimal point
<b>Power supply:</b>	230 VAC or 115VAC

### Connections:

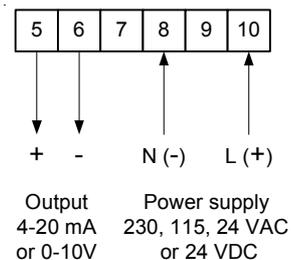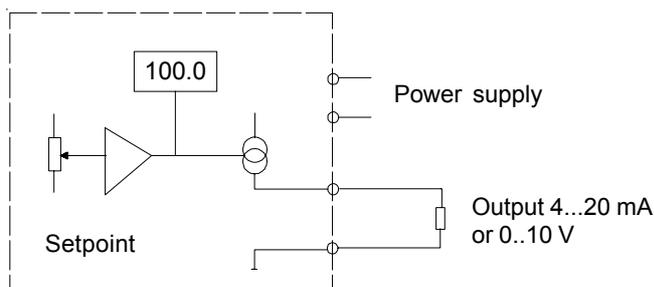

### Dimensions:

Cut out:  
91.7 x 91.7 mm  
Dimensions: mm

